
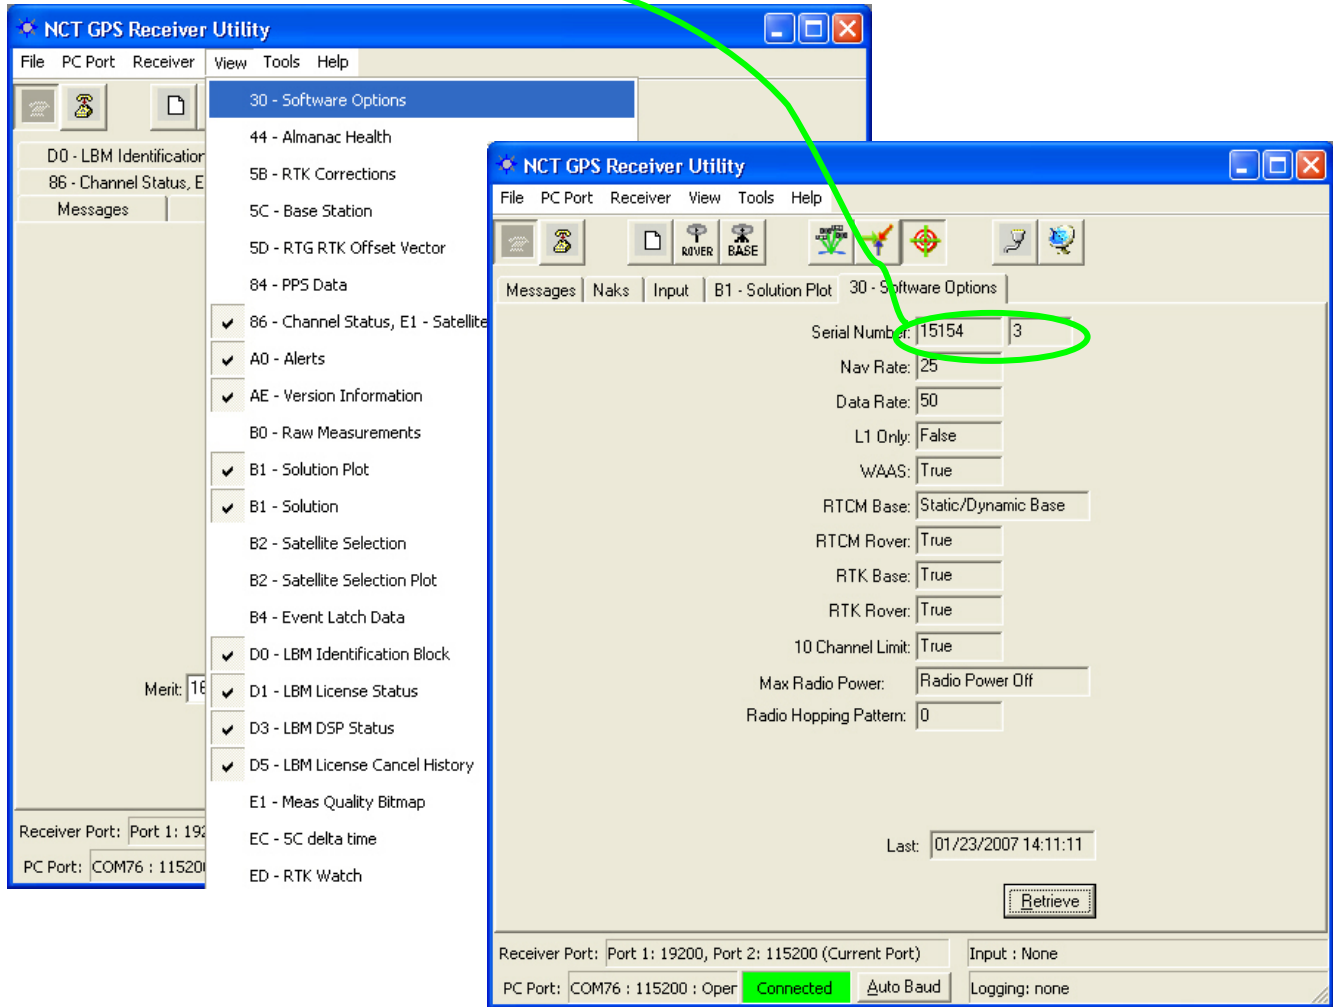


This guide will step you through loading software option to the GPS receiver via NavCom's StarUtil GUI program.
 Setup – See the *Troubleshooting Guide – Communication* if StarUtil is not communicating with the receiver.



✓ The following information are needed when purchasing a Software Options License Upgrade:

- Model #
- Receiver's Serial #
- Software Options Serial #

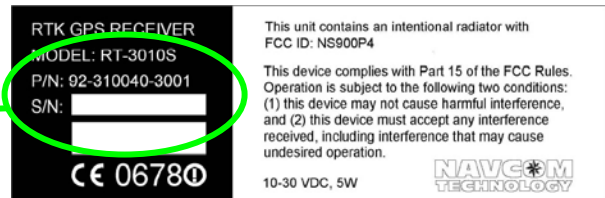


- ⚠ The GPS Receiver must be tracking satellites & have correct date and time.
- ⚠ Upload the new software options license as soon as possible, because it will expire within 30 days!


- ✓ Select *Tools* →
- ✓ Load *Software Options...* to bring up the Software Options dialog window.
- ✓ License Type Select: *Version 2*
 - Version 1 is for NCT-2000 10 Channel GPS Receiver
 - Version 2 is for NCT-2100 12 Channel GPS Receiver
- ✓ Open the *Software Options License* file using Windows Notepad editor and copy the *Options Code* license.

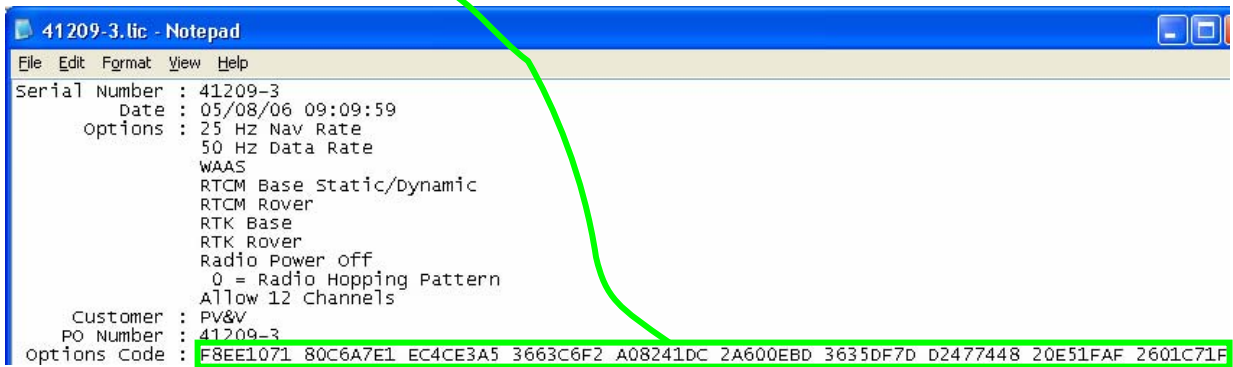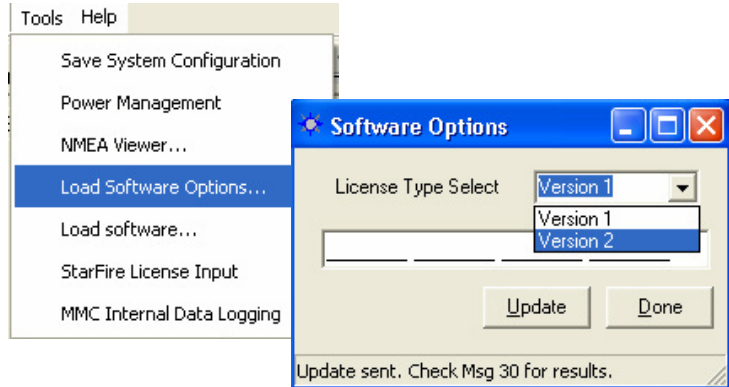

- ✓ Paste the *Options Code* license in the *Software Options* window.

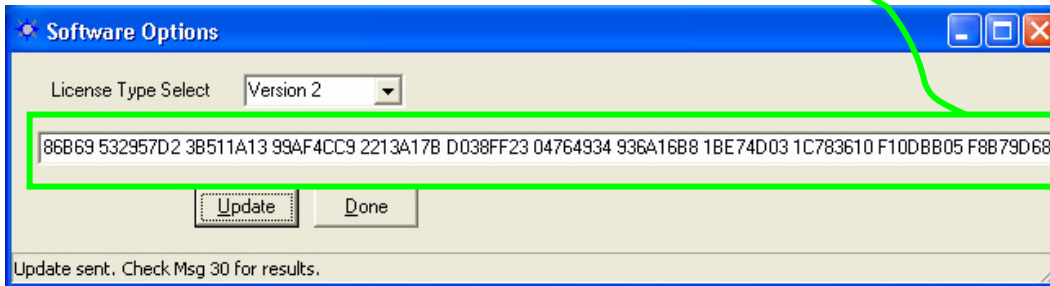

- ✓ Click *Update* to load the license and the status bar will read “*Update sent. Check Msg 30 for results*” in the lower left hand corner.
- ✓ Select *View* →
- ✓ 30 - *Software Options...*
- ✓ and click on the *Retrieve* information to check for updates.

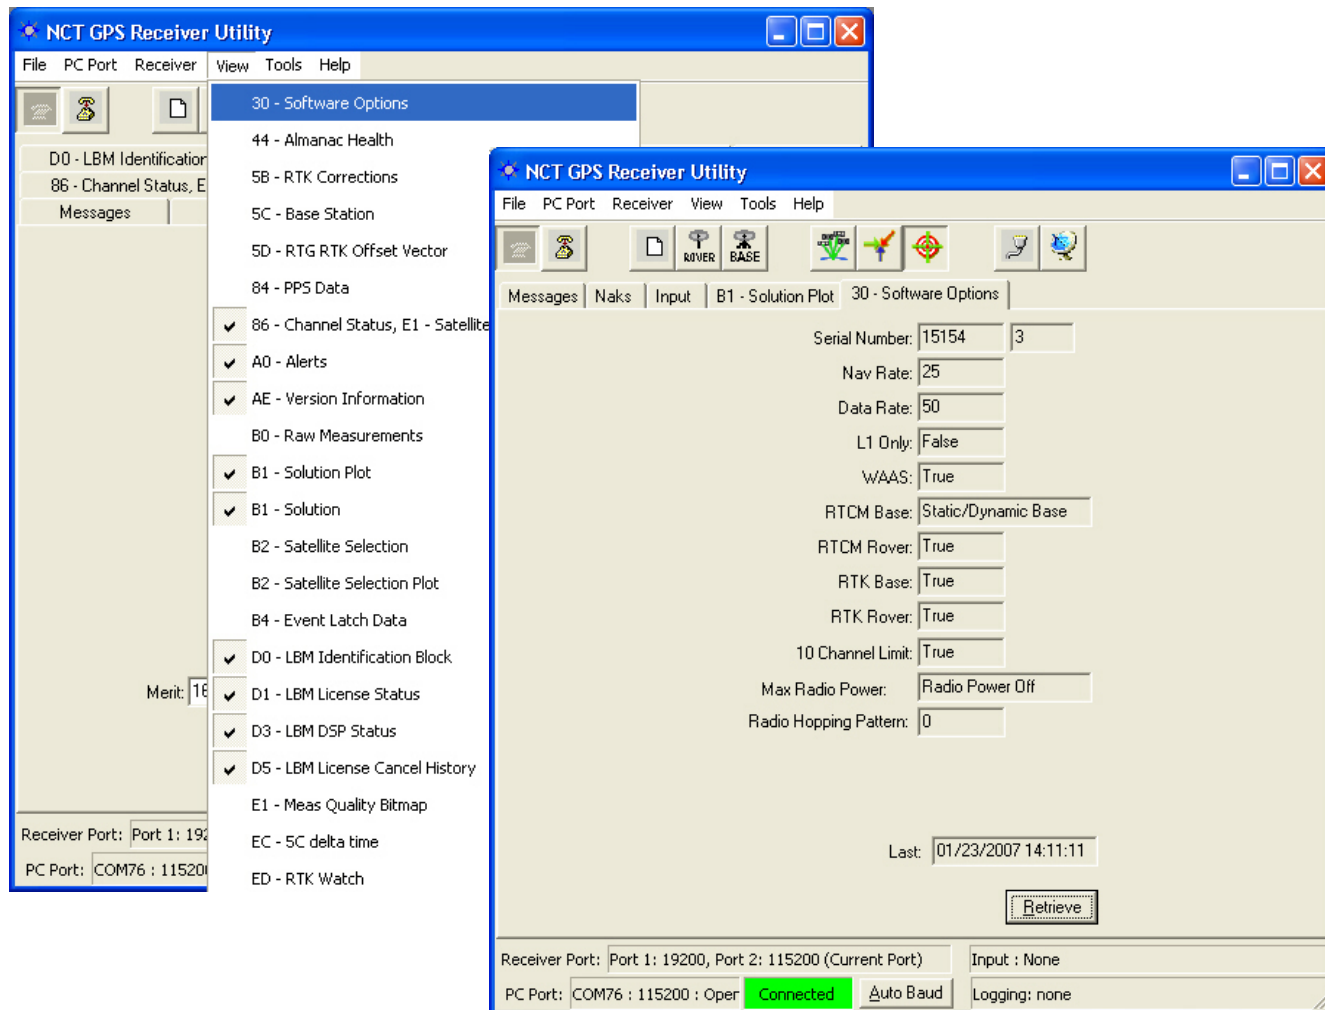

- ✓ If the Software Options License did not work, check the Nak Tab screen to view information and send an image capture to NavCom’s Customer Service for troubleshooting purposes.
- ✓ In addition, follow this procedure again and make sure the Options Code is entered correctly.